

Pre-Printing Process (Beginning of Day Maintenance)

REVEL DTF
2402T / 1202T



Table of Contents

1. White Ink Cycle
2. Load Ink
3. Head Clean
4. Nozzle Check




Step 1: White Ink Cycle

- White Ink Cycle must be performed at the following intervals;
 - 3 times at high speed (80)
 - 4 times at middle speed (50)
 - 3 times at low speed (20)
- Use the “Dial” above the button to choose the speed.
- Press the “White Ink Cycle” button on the side of the Ink Station to begin a white ink cycle.




Step 2: Load Ink

- On PrintEXP, go to the “Setting” tab and click the “Load Ink” button to begin an ink load.
 - Stop at 30 seconds

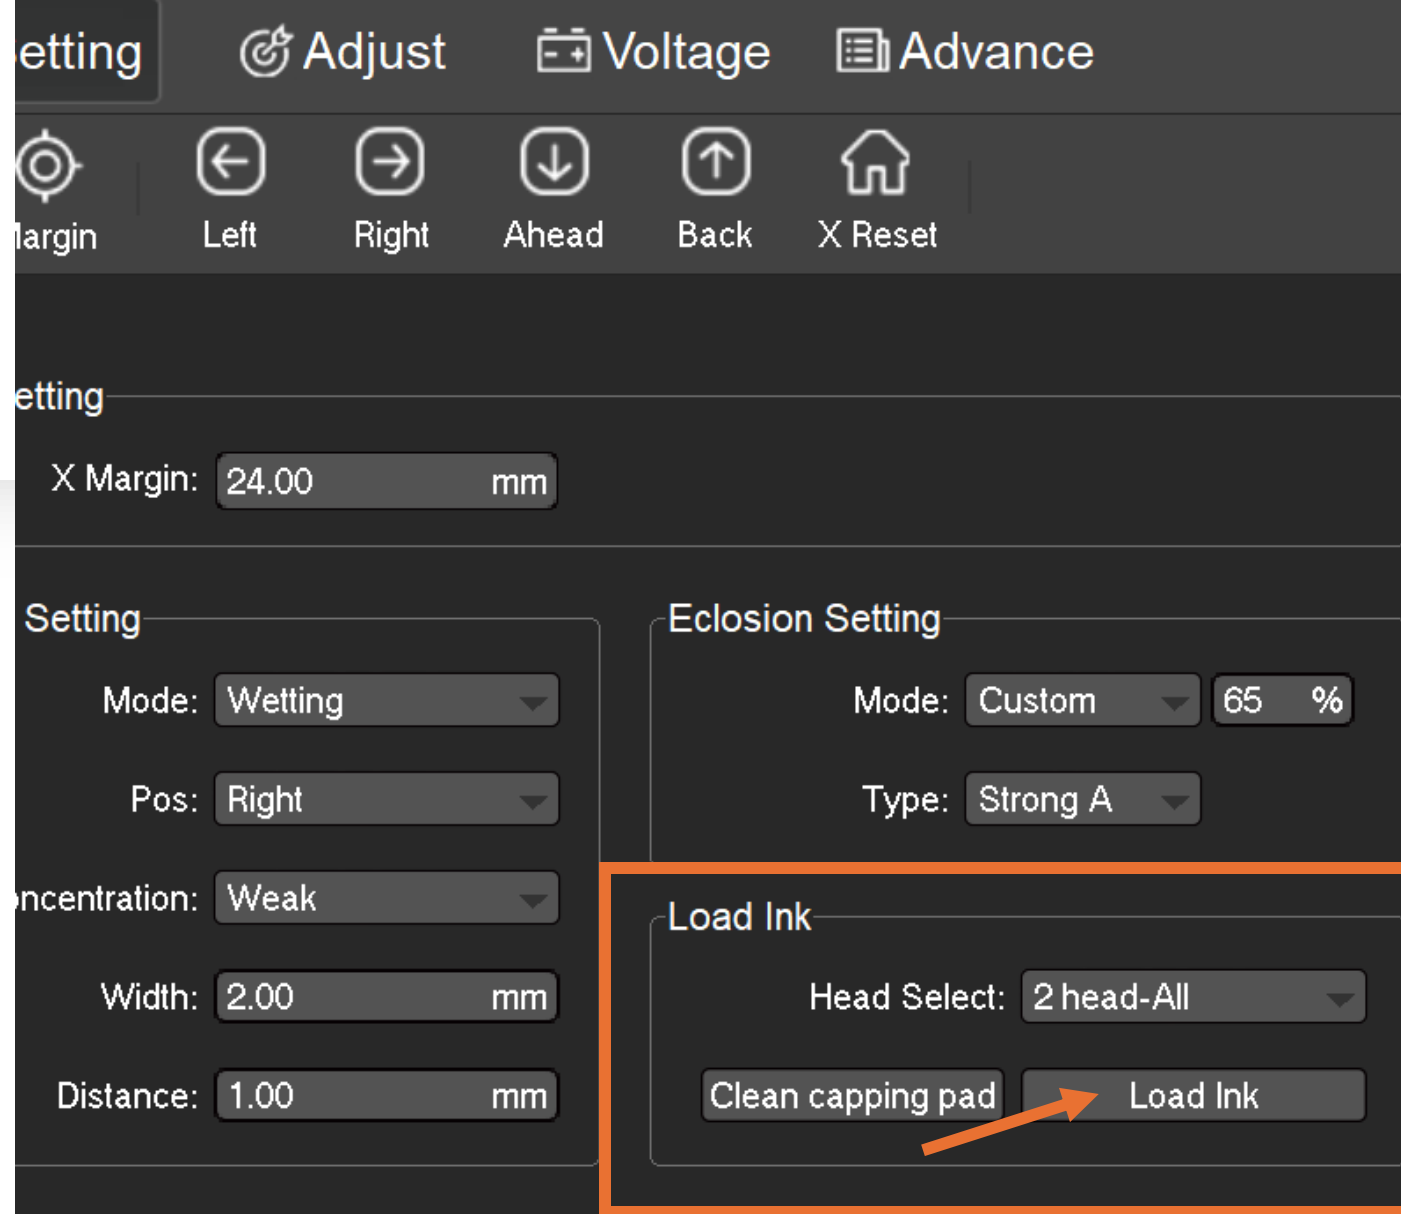

Step 3: Head Clean

- Click the “Clean” button to open the Head Clean options menu.
- Select “2-Head-All” and “Clean Strong” to start your head clean.

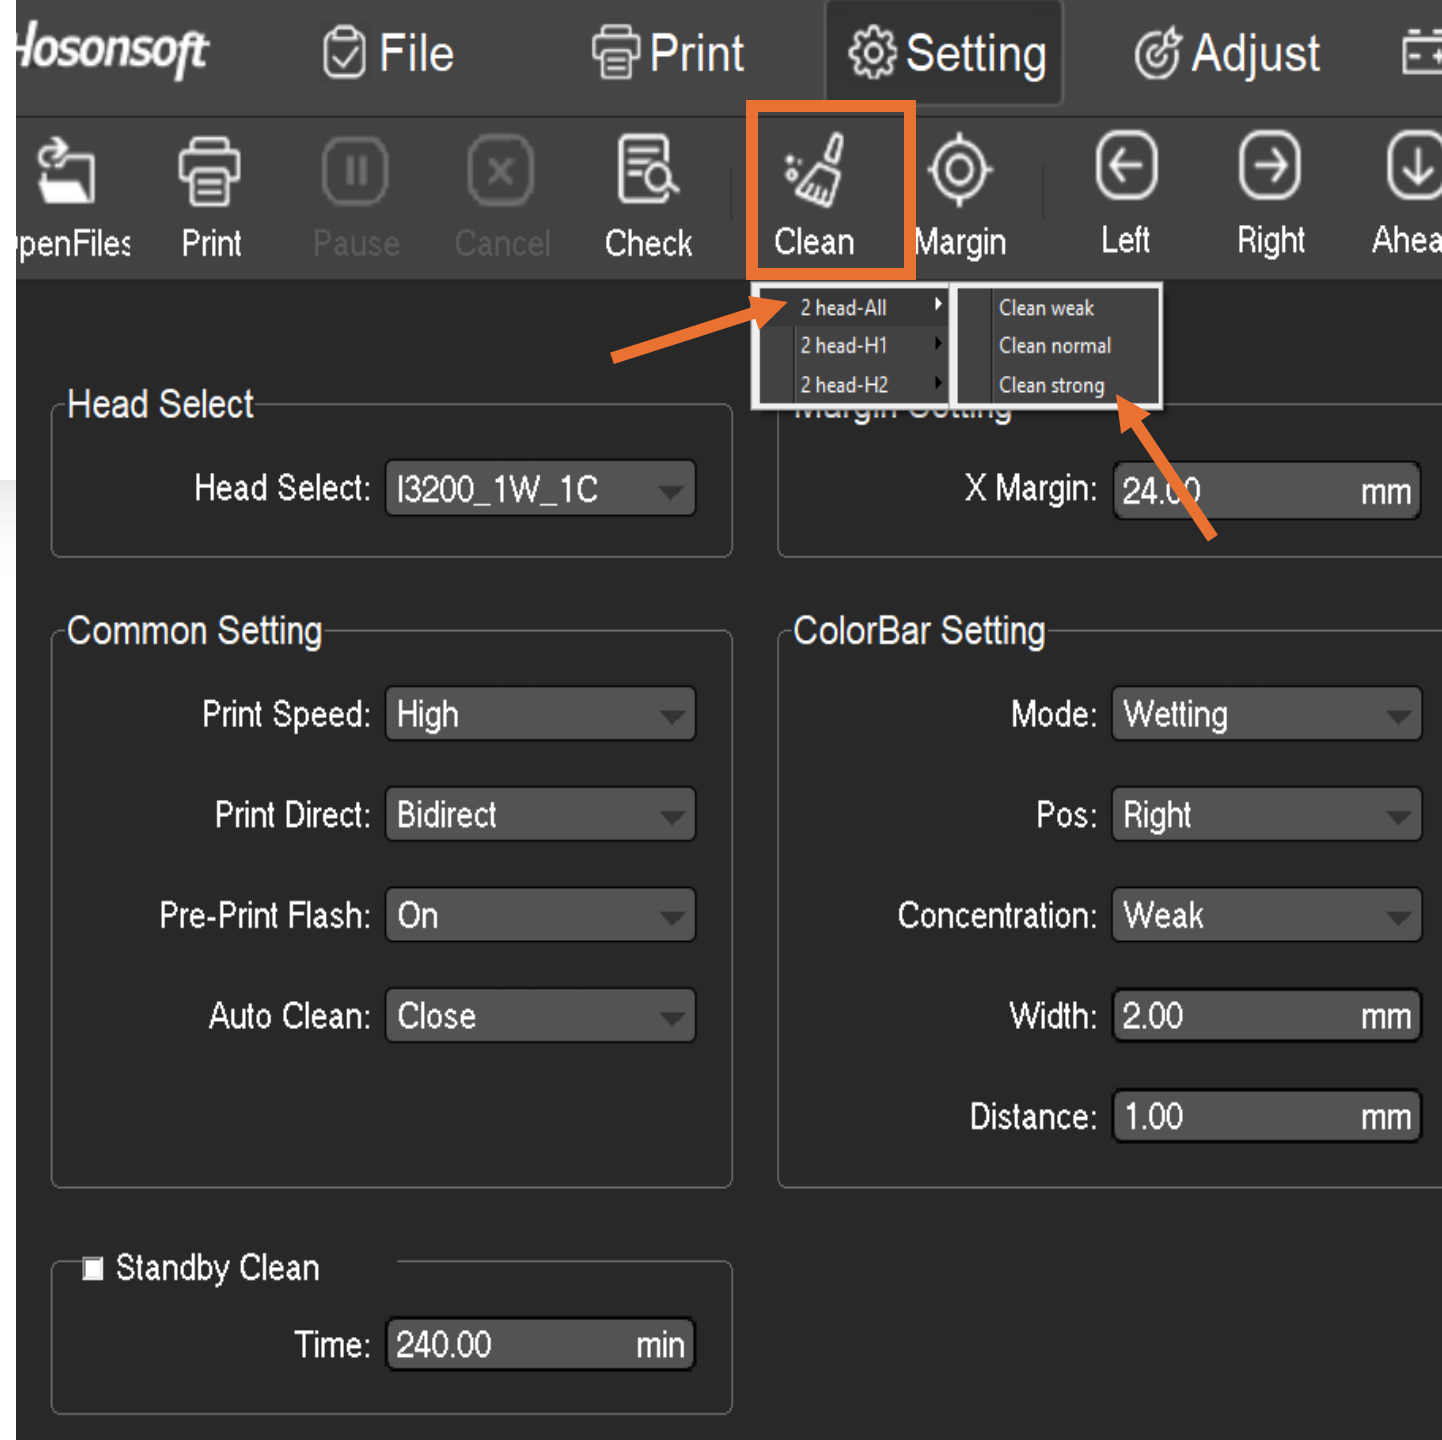

Step 4: Nozzle Check

- Click the “Check” button to begin a nozzle check. If the nozzle check results are good, you can begin printing.

